




**UNICAM  
SYSTEMS**  
LEGITIMATE SECURITY GUARANTEED

*India's Most Trusted CCTV Brand*

## **UC FHD 2200IR SYST-P 2MP HD IR DOME CAMERA**



- 1080P real-time image, high resolution, true color
- AHD / TVI / CVI / CVBS standard and lossless video output
- Up to 1000 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance and real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night, digital WDR
- Support noise reduction function
- 10 ~ 20m IR night view distance
- Support COC

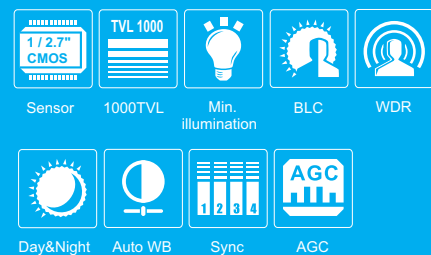

[www.unicamsystems.com](http://www.unicamsystems.com)

**SPECIFICATIONS**

**DIMENSIONS**

| Model                 | UC-FHD 2200IR SYST-P  |
|-----------------------|---|
| <b>Specifications</b> |   |
| <b>Camera</b>         |   |
| Image Sensor          | 1 / 3.2"CMOS  |
| Resolution            | 2MP   |
| Image Size            | 1920 x 1080   |
| Video Output          | AHD / TVI /CVI/CVBS   |
| Image System          | PAL / NTSC  |
| Electronic Shutter    | Auto; 1 / 50s ~1 / 100000s ( PAL );<br>1 / 60s ~ 1 / 100000s ( NTSC ) |
| IR Distance           | 10 ~20 m  |
| Frame Rate            | 30fps(60Hz); 25fps (50Hz)   |
| Min. Illumination     | 0 lux (IR ON)   |
| Lens                  | 2.8mm, 3.6 mm   |
| Lens Mount            | M12   |
| S / N Ratio           | ≥52dB (AGC OFF )  |
| <b>Functions</b>      |   |
| Function Control      | OSD ( COC Control )   |
| Day & Night           | ICR   |
| Digital WDR           | Yes   |
| Digital NR            | Yes   |
| AGC                   | Yes   |
| Auto White Balance    | Yes   |
| BLC                   | Yes   |
| FLC                   | Yes   |
| Defog                 | No  |
| HLC                   | No  |
| Sharpness             | Yes   |
| Mirror                | Yes   |
| Smart IR              | Yes   |
| Image Setting         | Yes   |
| Defect Correction     | Auto  |
| Language              | Chinese and English   |
| Angle Adjustment      | Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°                         |
| <b>Others</b>         |   |
| Power Supply          | DC12V ( ± 10% )   |
| Power Consumption     | IR OFF : < 1W; IR ON : < 3W   |
| Working Environment   | - 30 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)                      |
| Dimensions ( mm )     | Φ 77.5 x 67.6   |
| Weight ( net )        | Approx. <b>0.17KG</b>   |